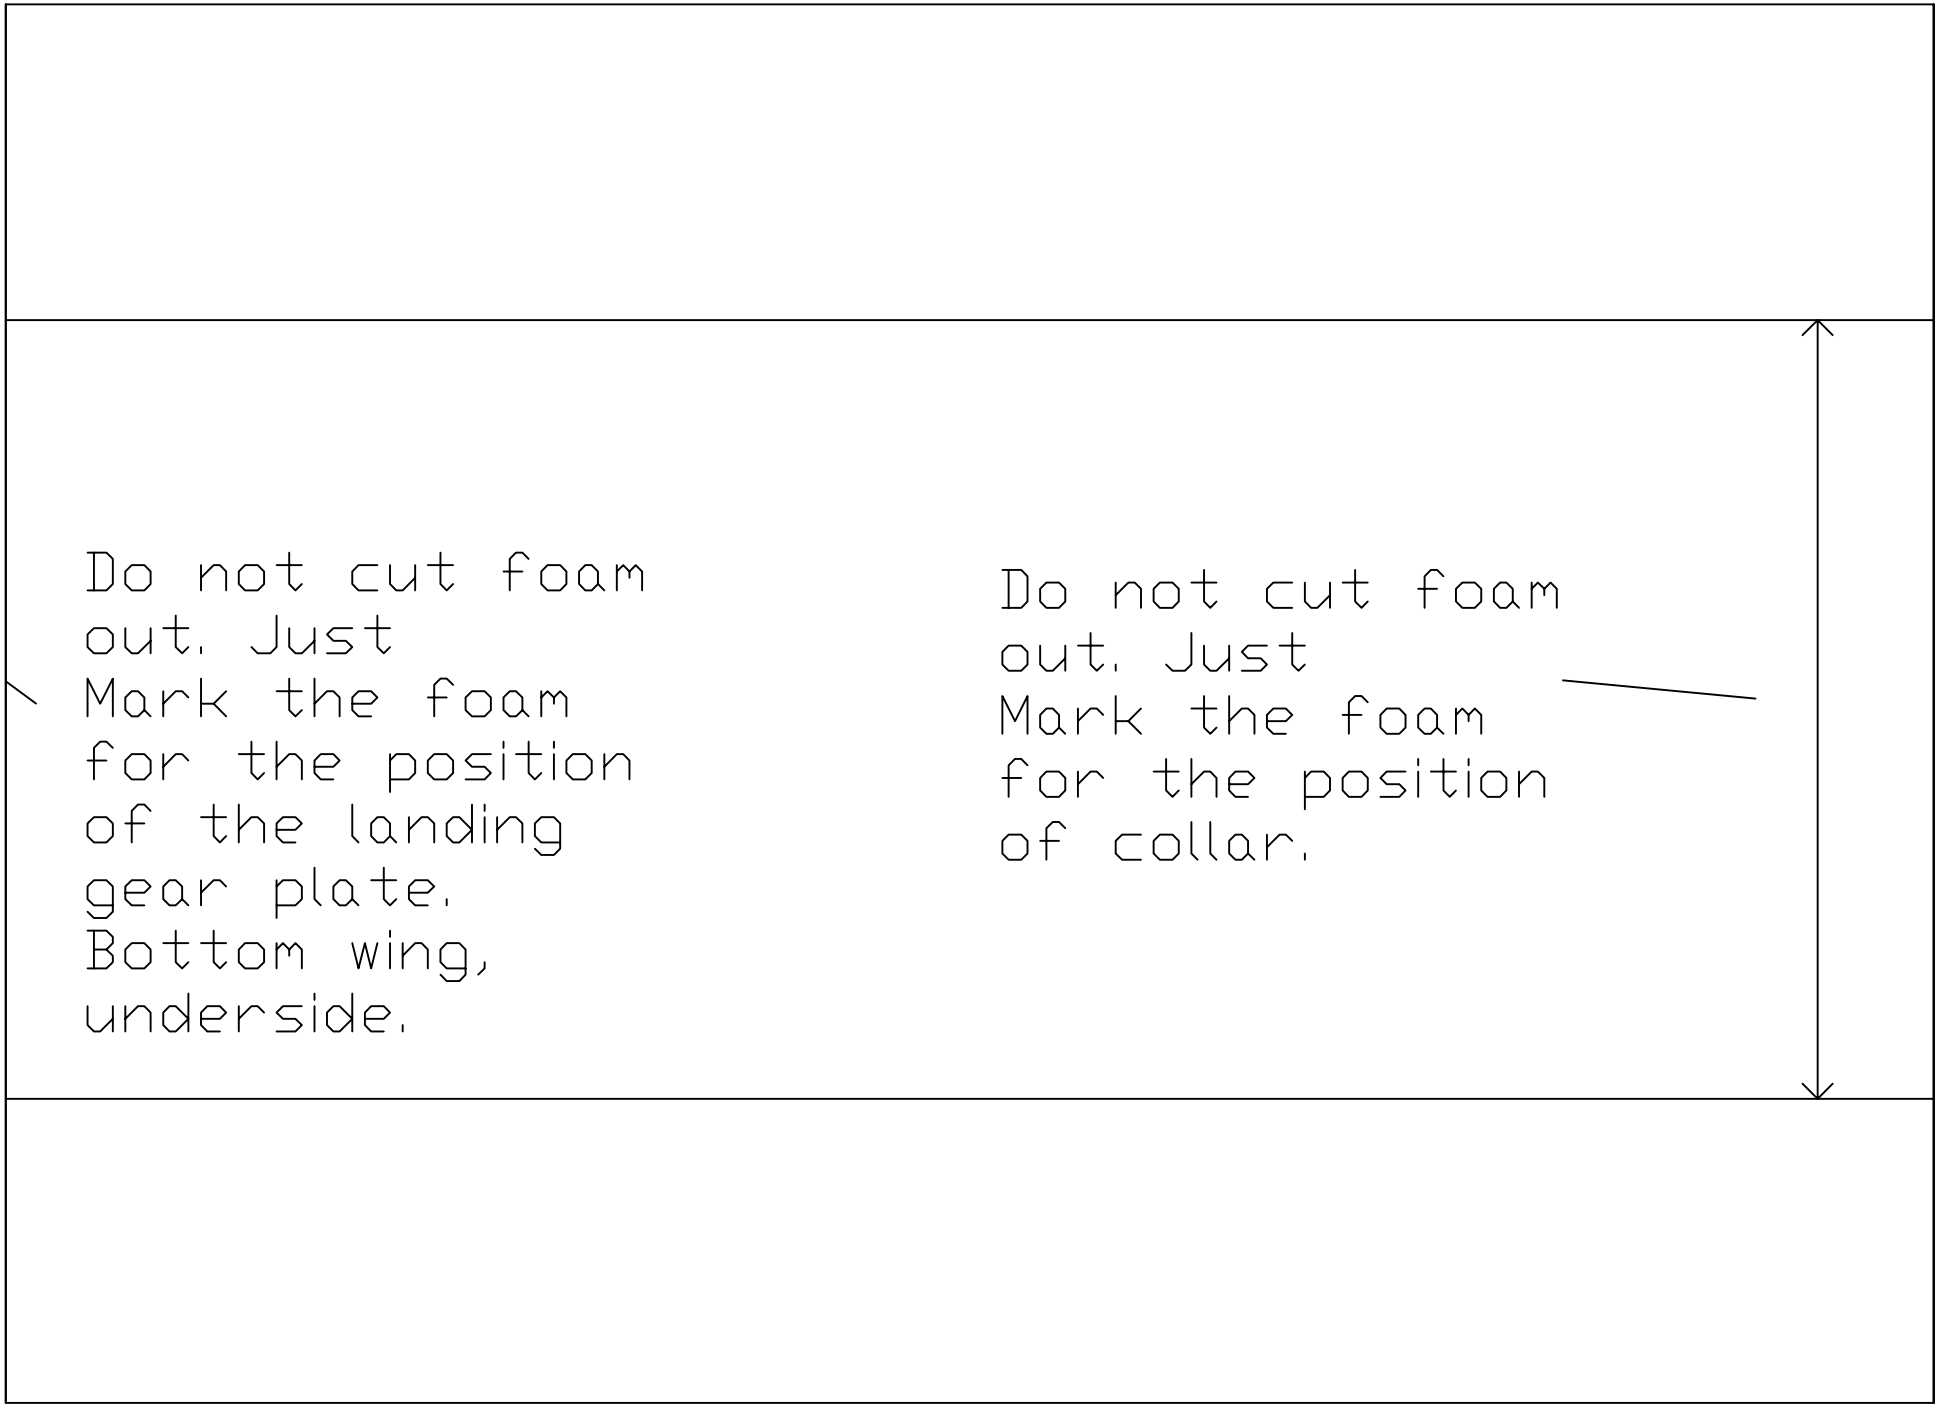

Do not cut foam
out. Just
Mark the foam
for the position
of the landing
gear plate.
Bottom wing,
underside.
Do not cut foam
out. Just
Mark the foam
for the position
of collar.