
Tail skid. 1mm Ply.
Line marks
insertion depth



Motor Mount.
3 mm PLY Holes in
corners for carbon
fibre pins to
strengthen mount.

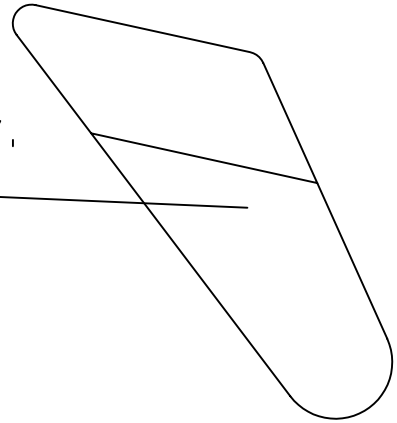